


Siesta Blinds Tensioning Instructions




1. You will need to remove your blind from the window sash using a Philips head screwdriver.

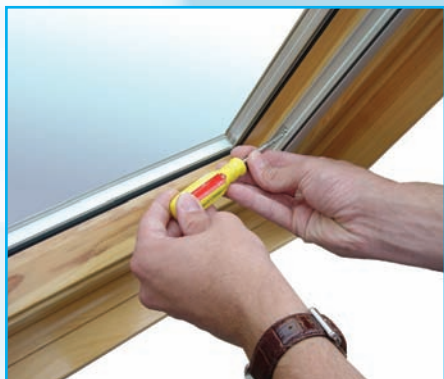

2. When you have the side rails unscrewed, insert the screwdriver under the plastic clip to remove it.



3. The plastic clip should now be free from its mounting.

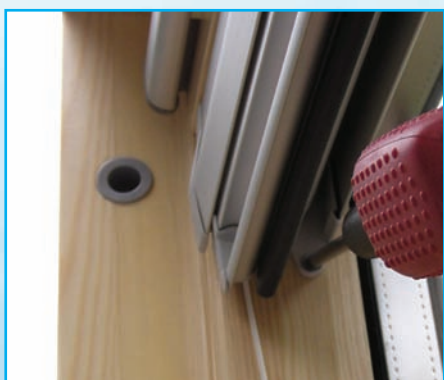

4. Now remove the top cassette from the sash by unscrewing the screws on either side of the unit.




5. The cassette may now be removed from the sash by strongly levering it to detach the adhesive strip.



6. When the cassette is removed locate the side marked with R. This is the side which needs to be re-tensioned.



7. Using the Philips screwdriver rotate the plastic face clockwise. Each half turn is registered by a 'click'.

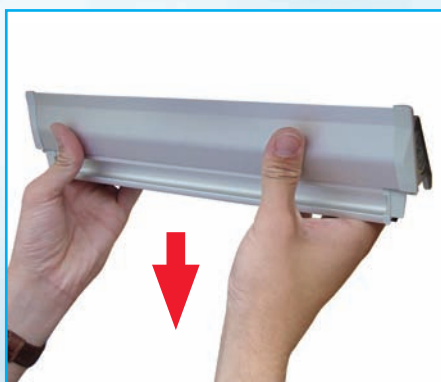

8. Test the operation of the blind by pulling the fabric out by 100mm (4") and releasing. It should rewind onto the barrel very strongly. If it is not rewinding onto the barrel, increase the number of turns as shown in point 7.



9. Now refit the blind using the original instructions and test the operation of the system by opening and closing the blind fully.